

DecayControl Pyramid Reflect


Decay Control Series

APPLICATIONS

Auditoriums | Band Rooms | Performance Space | Houses of Worship

Perform Acoustics DC-PYRR units are designed to be installed in a ceiling grid system or hung independently. Used in ceilings DC-PYRR Pyramid diffusers help control room decay by creating a smoother room decay. The added early reflection paths and lessening of specular energy create a more “musical space.” The R version units add stiffening to our standard DC-P units, resulting in less low frequency absorption. Used alone or in combination with other Perform Acoustics DC, RT, and EC Series products, better sound can be achieved in your room.

Pyramidal Diffuser

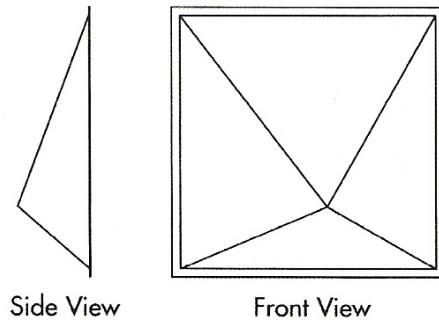

MECHANICAL SPECIFICATIONS

Core: 0.125 Thermoformed copolymer (recyclable) with 1-1/2” PCF fiberglass backing and additional stiffener, N.R.C. = .05

Sizes: 2’x2’, 2’x4’, 4’x4’

Finishes: Textured white finish

Mounting: Lay-in ceiling grid system, custom mounting available

Flammability: All components have a Class “A” rating per ASTM E84

ACOUSTICAL SPECIFICATIONS

Hz	125	250	500	1000	2000	4000	N.R.C.
DC-PYRR	.10	.08	.02	.01	.02	.08	.05