

EchoControl Tack Panels

Echo Control Series


APPLICATIONS

Boardrooms | Houses of Worship | Schools | Theaters

Perform Acoustics EC-TP panels reduce echoes and reverberation that interfere with speech and music sound quality. EC-TP wall panels are excellent sound-absorbing panels and good tackboards. This dual function is accomplished with a compound core of: 18 PCF fiberglass facing, laminated to 6-7 PCF fiberglass.

Specifically, ETF panels are used in conference rooms, corridors, classrooms, libraries, theaters, and high-traffic areas.

Core Section

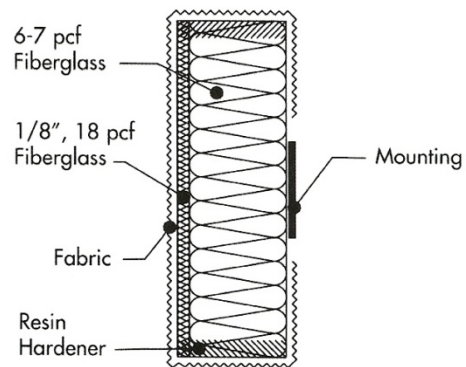

MECHANICAL SPECIFICATIONS

Core: Facing: 1/8", 18 PCF fiberglass. Backing: eco-friendly 6-7 PCF fiberglass, 4/8" to 4-1/8" thick

- Formaldehyde and Phenol Free
- GREENGUARD Children & School Certified
- GREENGUARD Certified
- 30% Post-Consumer Recycled Content

Sizes: Custom sizes and shapes up to 4' x 10' and 5' x 10'

Edges: Square, beveled, radiused, chemically hardened

Finishes: Fabric

Mounting: Adhesive, impaling clips, two-part Z-clips

Flammability: All components have a Class "A" rating per ASTM E84

ACOUSTICAL SPECIFICATIONS

Hz	125	250	500	1000	2000	4000	N.R.C.
EC-TP .875	.11	.29	.89	1.07	1.05	.94	.85
EC-TP 1.125	.27	.61	.98	.98	.93	.94	.90
EC-TP 1.625	.36	.70	1.13	1.09	1.07	1.00	1.00
EC-TP 2.125	.56	.92	1.17	1.12	1.11	1.07	1.10
EC-TP 3.125	.94	1.01	1.21	1.18	1.13	1.08	1.15