

EchoControl Perforated Vinyl Panels


Echo Control Series

APPLICATIONS

Corridors | Gymnasiums | Lobbies | Theatres

Building upon our standard sound-absorbing EC-P wall panel. EC-PV reduce echoes and reverberation that interfere with speech and music sound quality, while providing a high impact finish. EC-PV panels add a 0.06 poly-vinyl facing creates a panel that will not dent, as the covering will bend and return to its original positions. EC-PV panels come with hardened edges, and are offered with your choice of edge detail, and fabric covering.

Core Section

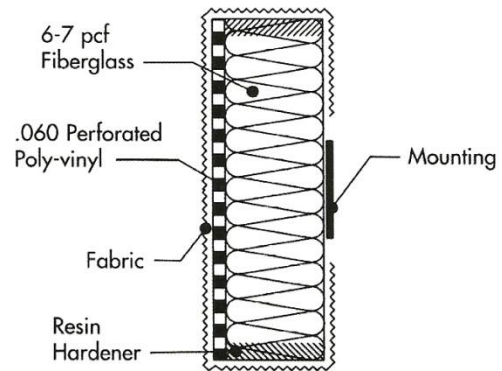

MECHANICAL SPECIFICATIONS

Core: Facing: Perforated .060 co-polymer. **Backing:** eco-friendly 6-7 PCF fiberglass, ½” to 4” thick

- Formaldehyde and Phenol Free
- GREENGUARD Certified
- GREENGUARD Children & School Certified
- 30% Post-Consumer Recycled Content

Sizes: Custom sizes and shapes up to 5’ x 10’

Edges: Square, beveled, radiused, chemically hardened

Finishes: Fabric

Mounting: Adhesive, impaling clips, two-part Z-clip

Flammability: All components have a Class “A” rating per ASTM E84

ACOUSTICAL SPECIFICATIONS

Hz	125	250	500	1000	2000	4000	N.R.C.
EC-PV 1	.05	.26	.82	1.08	1.05	1.02	.80
EC-PV 2	.46	.76	1.07	1.05	1.07	.99	1.00

Note: Sound absorption is based on using our standard fabric. Results may vary with the use of other materials.